

AHA SERIES

SHUTTER EXHAUST FANS



PERFORMANCE PARAMETERS

MODEL NO.	VOLTAGE (V)	FREQUENCY (Hz)	CURRENT (Amps)	POWER (W)	SPEED (RPM)	AIR FLOW (m3/h)	AIR(Pa) PRESSURE	NOISE (dB) @3m
AHA-12	220v~240v	50	0.13	30	1400	590	30	33.9
AHA-14	220v~240v	50	0.17	33	1400	710	48	39.4
AHA-16	220v~240v	50	0.21	46	1400	1180	59	43.9
AHA-20	220v~240v	50	0.5	98	1395	5950	-	-
AHA-26	220v~240v	50	0.5	132	950	9350	-	-


PRODUCT FEATURES

This powerful exhaust fan is designed to ventilate warehouses, workshops, greenhouse, sheds, chicken coops etc., it's wall/window mounted with steel shutters which are corrosion resistant and automatically close when fan stops working to protect the houses from outside dust and liquids.

- The blade is made of lightweight aluminum.
- Three louvers are made of commercial-grade metal, coated with matt black painting.
- High airflow but lower power consumption.
- Lower noise operation.
- Available specification of fan diameter: 250mm, 300mm, 350mm, 455mm, 610mm






AHA-12/14/16

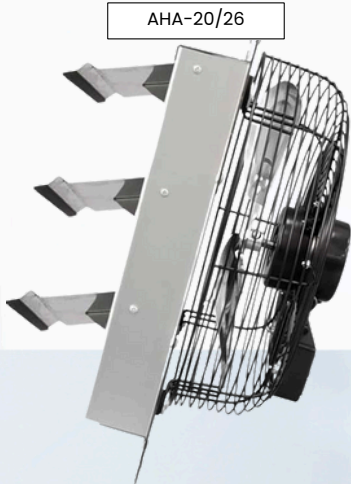


AHA-20/26

PERFORMANCE CURVES

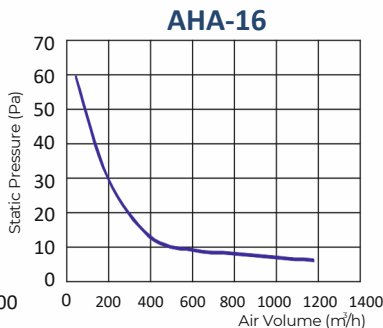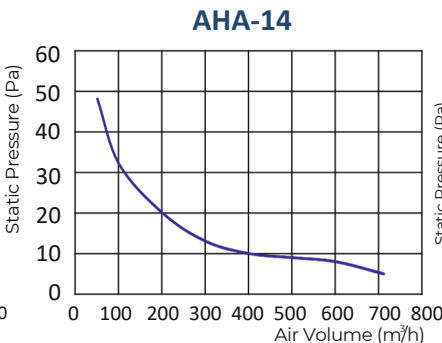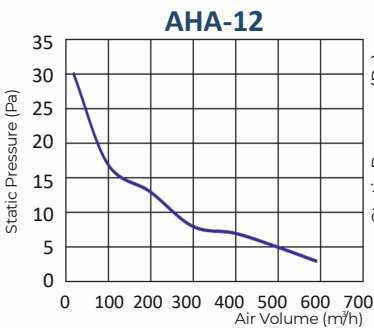

DIMENSIONS

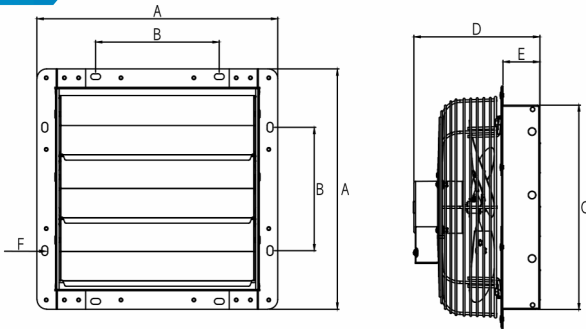

MODEL NO.	A	B	C	D	E	F
AHA-12	314	174	269	170	49	15*9
AHA-14	370	190	312	193	56	15*9
AHA-16	420	235	354	185	48	15*9
AHA-20	532	355	456	220	65	-
AHA-26	685	508	616	299	68	-