

Silent Mix Flow Fan

ASTBERG
VENTILATION

SPECIFICATIONS :

Body and panel are all made of PVC. Design with smooth duct and large impeller, advantage of large air volume , low noise and suitable for big space, high performance motor , equipped with high quality ball bearing , advantage of long service life , high efficiency and energy saving.24 Hours Running Capacity, Lowest Noise Level, Weather proof. Special snap joints design, easy installation, perfect seal conditions, easy maintenance. It may be used effectively to ventilate conference room, office, public place, hotel, house, and modernized toilets and washrooms.

PRODUCT FEATURES :

- 1. Full PVC plastic body, light weight but with enough strength, double insulation.
- 2. Super thin design, easy to install in those confined spaces.
- 3. The double-speed motors are controlled with a built-in switch (V option) or an external switch for multi speed fans.


PERFORMANCE PARAMETERS :

Model	Unit	ADD-100P ADD-125P	ADD-150P	ADD-200P
Voltage	(V/Hz)	220/50	220/50	220/50
Current	(Amps)	0.14	0.25	0.57
Power	(W)	33	50	128
Air Flow	(m³/h)	284	530	840
Air Pressure	(Pa)	159	300	352
Noise	(dB)	25	31	35
Weight	(kg)	2.8	4.0	5.9

DIMENSIONS :

Model	A	B	C	D	E	F	G	H
ADD-100P	330	Ø 98	248	462	4-Ø5.5	225	82	Ø 205
ADD-125P	330	Ø 123	248	462	4-Ø5.5	225	82	Ø 205
ADD-150P	351.6	Ø 148	251	488	4-Ø5.3	243.6	95	Ø 220.7
ADD-200P	436	Ø 198	339	567	4-Ø5.6	301	128	Ø 262

DIMENSION DIAGRAM :

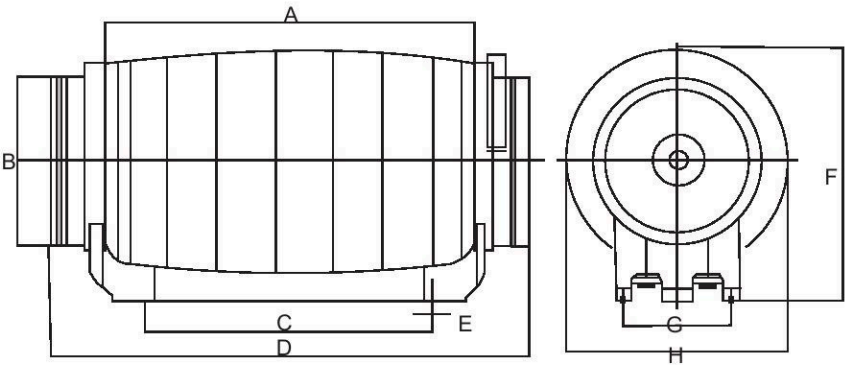

PERFORMANCE GRAPH :

